


# Axia 2

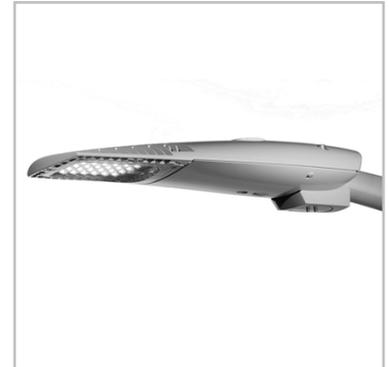

## The most comprehensive and economical LED lighting solution

Axia 2 provides the most comprehensive and best value LED solution for lighting any road, street or pedestrian area. It offers all the advantages of LED lighting, without the high cost associated with LEDs.

With its photometric engine providing light distributions adapted to various applications, Axia 2 is one of the highest performing luminaires available on the market to offer a fast return on investment.

Building on the strengths of the ground breaking Axia, this second-generation luminaire, is designed to be the ultimate multi-purpose fixture, providing a cost-effective solution for those looking to reduce their energy costs.

|       |       |       |
|-------|-------|-------|
| IP 66 | IK 10 | IK 09 |
| IK 08 |       |       |
|       |       | CE    |



## Concept

Axia 2 is composed of a high-pressure, die-cast aluminium body, universal fixation and a polycarbonate protector with integrated lenses.

For optimised heat dissipation, the electrical components and the LED engine are in separate compartments and juxtaposed in a horizontal section. The body integrates cooling fins to maintain performance in the long term.

Available in two sizes, Axia 2 is a very efficient LED lighting solution for streets, roads and any other outdoor environments where it is crucial to maximise energy savings.

The complete range is available with a universal fixation adapted for side-entry ( $\varnothing 32$ ,  $\varnothing 42$ ,  $\varnothing 48$  or  $\varnothing 60$ mm) and post-top ( $\varnothing 60$  or  $\varnothing 60$ mm) mounting. The inclination angle can be adjusted on-site in steps of  $2.5^\circ$ .

With its high ingress protection (IP 66) and strong resistance to impacts (IK 08 to IK 10), Axia 2 is built to withstand harsh conditions and to deliver a quality lighting with the minimum power consumption over decades.




Universal fixation for side-entry or post-top mounting with adjustable inclination in steps of  $2.5^\circ$ .



Easy access to the electrical compartment for maintenance.



ProFlex™ photometric engine for precise light distributions with the highest efficiency.

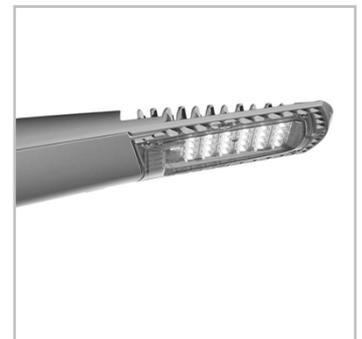

Cooling fins for optimised thermal management and long lasting performance.

## Types of application

- URBAN & RESIDENTIAL STREETS
- BRIDGES
- BIKE & PEDESTRIAN PATHS
- RAILWAY STATIONS & METROS
- CAR PARKS
- LARGE AREAS
- SQUARES & PEDESTRIAN AREAS
- ROADS & MOTORWAYS

## Key advantages

- Cost-effective and efficient lighting solution for a fast return on investment
- Smart City connectivity
- Photometric engine with light distributions adapted to various applications
- ThermiX® for long lasting performance
- FutureProof: follows the principles of circular economy
- Universal fixation adapted for side-entry and post-top mounting
- Adjustable inclination in steps of  $2.5^\circ$



ProFlex™

The ProFlex™ photometric engine integrates the lenses into a polycarbonate protector. This integration increases the output and reduces the reflection inside the optical unit. The polycarbonate used for the ProFlex™ photometric engine offers essential characteristics such as high optical clarity for a superior light transmission, better impact resistance compared to glass and a long life span with UV-stabilisation treatment. The ProFlex™ concept enables a compact design with a thin optical compartment. It provides extensive light distributions so that the spacing between the luminaires can be increased.






## Custom dimming profile

Intelligent luminaire drivers can be programmed with complex dimming profiles. Up to five combinations of time intervals and light levels are possible. This feature does not require any extra wiring.

The period between switching on and switching off is used to activate the preset dimming profile. The customised dimming system generates maximum energy savings while respecting the required lighting levels and uniformity throughout the night.

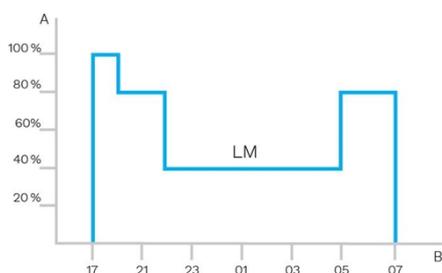

A. Performance | B. Time



## Daylight sensor / photocell

Photocell or daylight sensors switch the luminaire on as soon natural light falls to a certain level. It can be programmed to switch on during a storm, on a cloudy day (in critical areas) or only at nightfall so as to provide safety and comfort in public spaces.



## PIR sensor: motion detection


In places with little nocturnal activity, lighting can be dimmed to a minimum most of the time. By using passive infrared (PIR) sensors, the level of light can be raised as soon as a pedestrian or a slow vehicle is detected in the area.

Each luminaire level can be configured individually with several parameters such as minimum and maximum light output, delay period and ON/OFF duration time. PIR sensors can be used in an autonomous or interoperable network.



# Owlet IoT

Owlet IoT remotely controls luminaires in a lighting network, creating opportunities for improved efficiency, accurate real-time data and energy savings of up to 85%.

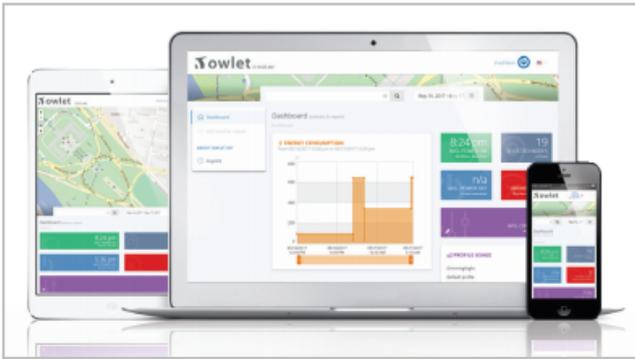

## ALL-IN-ONE

The LUCO P7 CM controller includes the most advanced features for optimised asset management. It also provides an integrated photocell and operates with an astronomical clock for seasonal dimming profile adaptations.

## EASY TO DEPLOY

Thanks to wireless communication, no cabling is needed. The network is not subject to physical constraints or limitations. From a single control unit to an unlimited network, you can expand your lighting scheme at any time.

With real-time geolocation and automatic detection of luminaire features, commissioning is quick and easy.

## USER-FRIENDLY

Once a controller is installed on a luminaire, the luminaire automatically appears with its GPS coordinates on a web-based map.

An easy-to-use dashboard enables each user to organise and customise screens, statistics and reports. Users can gain relevant, real-time insights.

The Owlet IoT web application can be accessed at all times from anywhere in the world with a device connected to the Internet. The application adapts to the device to offer an intuitive and user-friendly experience.

Real-time notifications can be pre-programmed to monitor the most important elements of the lighting scheme.



Plugging the LUCO P7 CM controller onto the 7-pin NEMA socket.

## SECURE

The Owlet IoT system uses a local wireless mesh communication networks to control the on-site luminaires combined with a remote control system utilising the cloud to ensure smooth data transfers to and from the central management system.

The system uses encrypted IP V6 communication to protect data transmission in both directions. Using a secure APN, Owlet IoT ensures a high level of protection.

In the exceptional case of a communication failure, the built-in astronomical clock and photocell will take over to switch the luminaires on and off, thus avoiding a complete blackout at night.

## EFFICIENT

Thanks to sensors and/or pre-programmed settings, lighting scenarios can be easily adapted to cope with live events, providing the right lighting levels at the right time and in the right place.

The integrated utility grade meter offers the highest accuracy available on the market today, enabling decisions based on real figures.

Accurate real-time feedback and clear reporting ensures that the network operates efficiently and maintenance is optimised.

When LED luminaires are switched on, the inrush current can create problems for the electricity grid. Owlet IoT incorporates an algorithm to preserve the grid at all times.

## OPEN

The LUCO P7 CM controller can be plugged onto the standard 7 pin NEMA socket and operates through either a DALI or 1-10V interface to control the luminaire.

Owlet IoT is based on the IPv6 protocol. This method for addressing devices can generate an almost unlimited number of unique combinations to connect non-traditional components to the Internet or computer network.

Through open APIs, Owlet IoT can be integrated into existing or future global management systems.

## GENERAL INFORMATION

|                                 |                                                               |
|---------------------------------|---------------------------------------------------------------|
| Recommended installation height | 5m to 10m   16' to 33'                                        |
| Driver included                 | Yes                                                           |
| CE Mark                         | Yes                                                           |
| ENEC+ certified                 | Yes                                                           |
| ROHS compliant                  | Yes                                                           |
| Testing standard                | LM 79-08 (all measurements in ISO17025 accredited laboratory) |

## HOUSING AND FINISH

|                        |                                           |
|------------------------|-------------------------------------------|
| Housing                | Aluminium                                 |
| Optic                  | Polycarbonate                             |
| Protector              | Polycarbonate (with integrated lenses)    |
| Housing finish         | Polyester powder coating                  |
| Standard colour(s)     | RAL 7040 window grey                      |
| Tightness level        | IP 66                                     |
| Impact resistance      | IK 08, IK 09, IK 10                       |
| Vibration test         | Compliant with modified IEC 68-2-6 (0.5G) |
| Access for maintenance | By loosening screws on the bottom cover   |

· Any other RAL or AKZO colour upon request

· IK may be different according to the size/configurations. Please consult us.

## OPERATING CONDITIONS

|                                  |                                           |
|----------------------------------|-------------------------------------------|
| Operating temperature range (Ta) | -30 °C up to +50 °C / -22 °F up to 122 °F |
|----------------------------------|-------------------------------------------|

· Depending on the luminaire configuration. For more details, please contact us.

## ELECTRICAL INFORMATION

|                                     |                                                                         |
|-------------------------------------|-------------------------------------------------------------------------|
| Electrical class                    | Class I EU, Class II EU                                                 |
| Nominal voltage                     | 220-240V – 50-60Hz                                                      |
| Power factor (at full load)         | 0.9                                                                     |
| Surge protection options (kV)       | 10                                                                      |
| Electromagnetic compatibility (EMC) | EN 55015 / EN 61000-3-2 / EN 61000-4-5 / EN 61547                       |
| Control protocol(s)                 | 1-10V, DALI                                                             |
| Control options                     | AmpDim, Bi-power, Custom dimming profile, Photocell, Remote management  |
| Socket                              | NEMA 3-pin (optional)<br>NEMA 6-pin (optional)<br>NEMA 7-pin (optional) |
| Associated control system(s)        | Owlet Nightshift<br>Owlet IoT                                           |
| Sensor                              | PIR (optional)                                                          |

## OPTICAL INFORMATION


|                                  |                                                     |
|----------------------------------|-----------------------------------------------------|
| LED colour temperature           | 3000K (Warm White 830)<br>4000K (Neutral White 740) |
| Colour rendering index (CRI)     | >80 (Warm White 830)<br>>70 (Neutral White 740)     |
| Upward Light Output Ratio (ULOR) | 0%                                                  |

## LIFETIME OF THE LEDS @ TQ 25°C

|                    |                |
|--------------------|----------------|
| All configurations | 100,000h - L90 |
|--------------------|----------------|

## DIMENSIONS AND MOUNTING

|                              |                                                                                                                                                                                          |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AxBxC (mm   inch)            | AXIA 2.1 - 650x132x250   25.6x5.2x9.8<br>AXIA 2.2 - 895x132x300   35.2x5.2x11.8                                                                                                          |
| Weight (kg   lbs)            | AXIA 2.1 - 6.7   14.7<br>AXIA 2.2 - 9.5   20.9                                                                                                                                           |
| Aerodynamic resistance (CxS) | AXIA 2.1 - 0.05<br>AXIA 2.2 - 0.07                                                                                                                                                       |
| Mounting possibilities       | Side-entry slip-over - Ø32mm<br>Side-entry slip-over - Ø42mm<br>Side-entry slip-over - Ø48mm<br>Side-entry slip-over - Ø60mm<br>Post-top slip-over - Ø60mm<br>Post-top slip-over - Ø76mm |

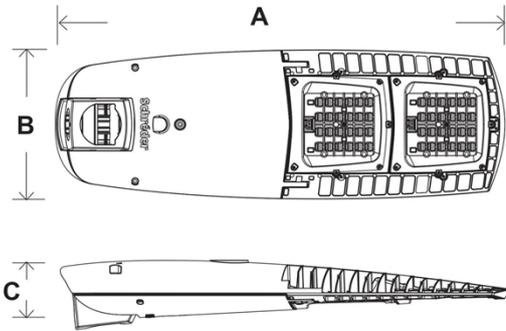



| Luminaire | Number of LEDs | Current (mA) | Luminaire output flux (lm)<br>Warm White 830 |      | Luminaire output flux (lm)<br>Neutral White 740 |      | Power consumption (W) | Luminaire efficacy (lm/W) | Photometry |
|-----------|----------------|--------------|----------------------------------------------|------|-------------------------------------------------|------|-----------------------|---------------------------|------------|
|           |                |              | Min                                          | Max  | Min                                             | Max  |                       |                           |            |
| AXIA 2.1  | 4              | 680          | 300                                          | 900  | 400                                             | 1100 | 10.3                  | 110                       |            |
|           | 8              | 480          | 500                                          | 1400 | 600                                             | 1600 | 13.9                  | 123                       |            |
|           | 8              | 690          | 700                                          | 1900 | 800                                             | 2300 | 20                    | 121                       |            |
|           | 8              | 820          | 800                                          | 2200 | 1000                                            | 2600 | 23.7                  | 118                       |            |
|           | 16             | 390          | 900                                          | 2400 | 1000                                            | 2800 | 21.2                  | 134                       |            |
|           | 16             | 480          | 1100                                         | 2900 | 1300                                            | 3300 | 25.6                  | 129                       |            |
|           | 16             | 600          | 1300                                         | 3500 | 1500                                            | 4100 | 31.8                  | 129                       |            |
|           | 16             | 690          | 1500                                         | 3900 | 1700                                            | 4600 | 36.5                  | 126                       |            |
|           | 16             | 760          | 1600                                         | 4200 | 1900                                            | 4900 | 40                    | 122                       |            |
|           | 24             | 490          | 1700                                         | 4400 | 2000                                            | 5100 | 37.9                  | 136                       |            |
|           | 24             | 540          | 1800                                         | 4800 | 2200                                            | 5600 | 41.5                  | 135                       |            |
|           | 24             | 630          | 2100                                         | 5400 | 2500                                            | 6300 | 49                    | 130                       |            |
|           | 24             | 690          | 2300                                         | 5900 | 2700                                            | 6900 | 54                    | 129                       |            |
|           | 24             | 750          | 2400                                         | 6300 | 2800                                            | 7300 | 58.5                  | 125                       |            |
|           | 24             | 890          | 2800                                         | 7200 | 3300                                            | 8400 | 69.5                  | 122                       |            |

Tolerance on LED flux is ± 7% and on total luminaire power ± 5 %



| Luminaire | Number of LEDs | Current (mA) | Luminaire output flux (lm)<br>Warm White 830 |       | Luminaire output flux (lm)<br>Neutral White 740 |       | Power consumption (W) | Luminaire efficacy (lm/W) | Photometry |
|-----------|----------------|--------------|----------------------------------------------|-------|-------------------------------------------------|-------|-----------------------|---------------------------|------------|
|           |                |              | Min                                          | Max   | Min                                             | Max   |                       |                           |            |
| AXIA 2.2  | 32             | 690          | 3100                                         | 7900  | 3600                                            | 9200  | 71                    | 131                       |            |
|           | 32             | 860          | 3700                                         | 9400  | 4300                                            | 11000 | 89                    | 128                       |            |
|           | 32             | 960          | 4000                                         | 10300 | 4700                                            | 12000 | 100                   | 124                       |            |
|           | 40             | 370          | 2200                                         | 5700  | 2600                                            | 6700  | 47.5                  | 146                       |            |
|           | 40             | 410          | 2500                                         | 6200  | 2900                                            | 7300  | 52                    | 145                       |            |
|           | 40             | 450          | 2700                                         | 6800  | 3100                                            | 7900  | 57                    | 142                       |            |
|           | 40             | 480          | 2800                                         | 7200  | 3300                                            | 8400  | 60.5                  | 142                       |            |
|           | 40             | 760          | 4200                                         | 10700 | 4900                                            | 12500 | 96                    | 133                       |            |
|           | 40             | 920          | 4900                                         | 12500 | 5800                                            | 14600 | 118                   | 127                       |            |
|           | 40             | 1000         | 5300                                         | 13300 | 6200                                            | 15600 | 129                   | 122                       |            |
|           | 48             | 460          | 3300                                         | 8300  | 3800                                            | 9700  | 69                    | 144                       |            |
|           | 48             | 530          | 3700                                         | 9400  | 4400                                            | 11000 | 80                    | 143                       |            |
|           | 48             | 590          | 4100                                         | 10300 | 4800                                            | 12100 | 89                    | 141                       |            |
|           | 48             | 660          | 4500                                         | 11400 | 5300                                            | 13300 | 100                   | 137                       |            |
|           | 48             | 730          | 4900                                         | 12400 | 5800                                            | 14500 | 110                   | 134                       |            |
|           | 48             | 800          | 5300                                         | 13400 | 6200                                            | 15600 | 121                   | 130                       |            |
|           | 48             | 890          | 5800                                         | 14600 | 6800                                            | 17100 | 136                   | 127                       |            |
|           | 48             | 960          | 6200                                         | 15500 | 7200                                            | 18100 | 147                   | 124                       |            |
|           | 48             | 1000         | 6400                                         | 16000 | 7400                                            | 18700 | 152                   | 123                       |            |

Tolerance on LED flux is  $\pm 7\%$  and on total luminaire power  $\pm 5\%$

