

AMPERA EVO



High-performance LED lighting solution with fast return on investment

Creating an efficient, economical and sustainable LED lighting solution was the driving force behind the development of AMPERA EVO.

AMPERA EVO is a road luminaire highlighting high performance, technical innovation, and simplicity. This innovative luminaire thus provides powerful lighting, fast and simple installation, easy lighting network management, as well as the fastest return on investment.

Available with various lumen packages - and numerous lighting distributions - the AMPERA EVO can meet all your road and urban lighting needs.



Concept

AMPERA EVO comes in two separate high-pressure die cast aluminium parts for the greatest installation and maintenance ease. The two parts are connected by two tool-free side latches. The electrical connection is automatically triggered on closing via a knife-type connector. This system allows safe connection with the mains cabling and prevents from any cabling error inside the gear compartment.

AMPERA EVO is available in two sizes to offer maximum flexibility and aesthetic coherence for town and city centres. AMPERA EVO takes advantage of the latest photometric innovations. It uses the LensoFlex® and MidFlex photometric engines, which have been developed around the concepts of high performance, compactness, versatility and standardisation.

AMPERA EVO comes with the IzyFix universal fixation system adapted to post-top and side-entry mounting on any pole arms (from Ø32mm, with adapter, to Ø76mm). The IzyFix system enables the luminaire to be switched from one position to another at any time, without removing it from the pole, offering complete versatility regarding pole and bracket configuration. The inclination angle can be adjusted on-site (tilting range of 110°), in both the post-top and side-entry position, to optimise the light distribution.

AMPERA EVO is a future-proof luminaire designed for a more sustainable future. It is made of highly recyclable materials and offers tool-free access for maintenance operations. Moreover, AMPERA EVO can be equipped with various control options allowing easy remote management of lighting network, with advanced features that enable the light intensity to be adjusted to what is strictly needed, thus creating environments favourable to flora and fauna.



Tool-free opening, and a mounting with two separate parts for easy installation.



The IzyFix universal fixation system, with switching from a post-top to a side-entry position, facilitates luminaire ordering and installation.

TYPES OF APPLICATION

- URBAN & RESIDENTIAL STREETS
- BRIDGES
- BIKE & PEDESTRIAN PATHS
- RAILWAY STATIONS & METROS
- CAR PARKS
- LARGE AREAS
- SQUARES & PEDESTRIAN AREAS
- ROADS & MOTORWAYS

KEY ADVANTAGES

- Cost-effective and efficient lighting solution for a fast return on investment
- On-site adjustment from post-top to side-entry without disconnecting the luminaire from the pole thanks to IzyFix
- Tool free access: easy and safe maintenance
- Connected-ready for your future Smart city requirements
- Compatible with the Schröder EXEDRA control platform
- Zhaga-D4i certified
- Adjustable inclination on-site



Connected-ready for your future smart city projects.




Designed for a more sustainable future.



LensoFlex®4

LensoFlex®4 maximises the heritage of the LensoFlex® concept with a very compact yet powerful photometric engine based upon the addition principle of photometric distribution. The number of LEDs in combination with the driving current determines the intensity level of the light distribution. With optimised light distributions and very high efficiency, this fourth generation enables the products to be downsized to meet application requirements with an optimised solution in terms of investment.

LensoFlex®4 optics can feature backlight control to prevent intrusive lighting, or a glare limiter for high visual comfort.

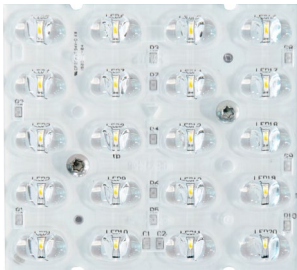

MidFlex™

The MidFlex photometric engine is based on the same principle as LensoFlex®2: each LED is associated with a specific lens that generates the complete photometric distribution of the luminaire. MidFlex takes advantage of the maturity of mid-power LEDs for professional applications. The MidFlex photometric engines are based on the combination of several modules of 48 mid-power LEDs tightly positioned to maximise the LED density. This concept provides high lumen packages with a limited product footprint. The MidFlex photometric engines offers excellent efficiency for a sustainable performance.






Custom dimming profile

Intelligent luminaire drivers can be programmed with complex dimming profiles. Up to five combinations of time intervals and light levels are possible. This feature does not require any extra wiring.

The period between switching on and switching off is used to activate the preset dimming profile. The customised dimming system generates maximum energy savings while respecting the required lighting levels and uniformity throughout the night.

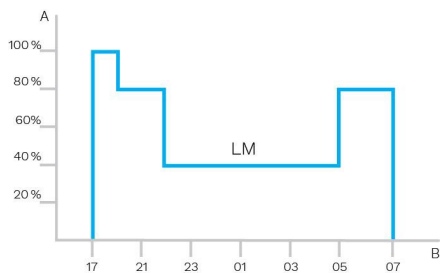


A. Dimming level | B. Time



Daylight sensor / photocell

Photocell or daylight sensors switch the luminaire on as soon natural light falls to a certain level. It can be programmed to switch on during a storm, on a cloudy day (in critical areas) or only at nightfall so as to provide safety and comfort in public spaces.

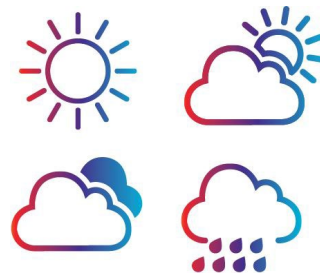

PIR sensor: motion detection


In places with little nocturnal activity, lighting can be dimmed to a minimum most of the time. By using passive infrared (PIR) sensors, the level of light can be raised as soon as a pedestrian or a slow vehicle is detected in the area.

Each luminaire level can be configured individually with several parameters such as minimum and maximum light output, delay period and ON/OFF duration time. PIR sensors can be used in an autonomous or interoperable network.




The Schröder IzyFix patented high-pressure die-casted aluminium universal fixation system is an integral part of the luminaire mounted in the factory. The IzyFix system aims to fit needs worldwide by meeting IEC and ANSI 3G testing requirements. It is intended to simplify life for customers and installers in the process of purchasing and installing luminaires for various applications.

Variation for all poles

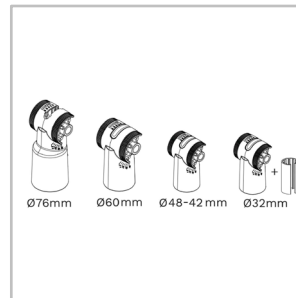

Due to the many different applications used worldwide, Schröder has created a range of fixation systems and reducers to satisfy all needs that might come up on the market.


	IzyFix Ø60mm	IzyFix Ø76mm
Ø32mm spigot	✓ (with reducer)	✓ (with reducer)
Ø42-48mm spigot	✓	✓ (with reducer)
Ø60mm spigot	✓	✓
Ø76mm spigot	✗	✓

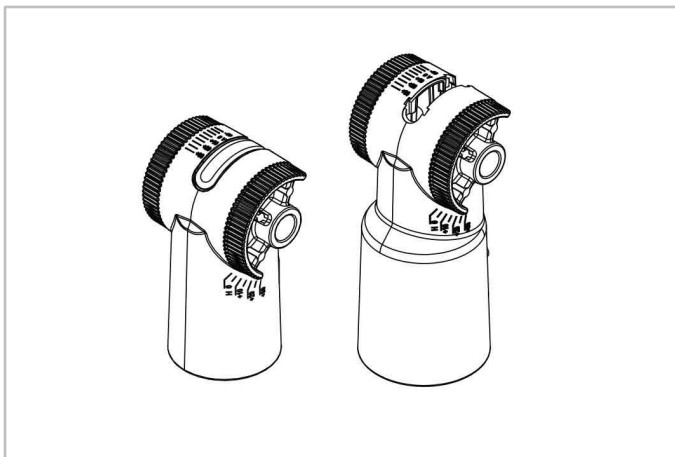

From post-top to side-entry in one movement

The innovative design allows changing from a side-entry to a post-top position – even with luminaires ordered with factory pre-cablings – without any switching work on the fixation or disconnection from the pole. Therefore the type of mounting (horizontal or vertical) does not have to be considered when ordering. This unique feature also eases installation. After setting the correct position, an accessory is provided to cover the resulting space and ensure further protection of the luminaire.

Best-in-class tilting range

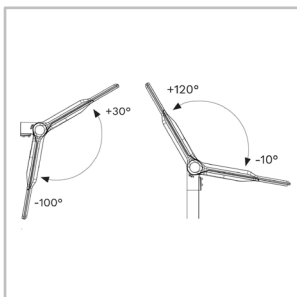

The IzyFix universal fixation system enables a best-in-class range of mounting angle of 130°*, to ensure maximum lighting performance for all kinds of road scenarios and offer the possibility of installing the luminaire in extreme situations as well. With a setting mark on the body and angles on the spigot, adjusting is carried out in 5° increments by loosening two screws. The wide tilting range enables more comfortable access to the gear

compartment during field maintenance.

*Depending on the size and shape of the luminaire, the inclination angle may be reduced. For more accurate information, always consult the installation sheets.

Schröder EXEDRA is the most advanced lighting management system on the market for controlling, monitoring and analysing streetlights in a user-friendly way.



Standardisation for interoperable ecosystems

Schröder plays a key role in driving standardisation with alliances and partners such as uCIFI, TALQ or Zhaga. Our joint commitment is to provide solutions designed for vertical and horizontal IoT integration. From the body (hardware) to the language (data model) and the intelligence (algorithms), the complete Schröder EXEDRA system relies on shared and open technologies. Schröder EXEDRA also relies on Microsoft Azure for cloud services, provided with the highest levels of trust, transparency, standards conformance and regulatory compliance.

Breaking the silos


With EXEDRA, Schröder has taken a technology-agnostic approach: we rely on open standards and protocols to design an architecture able to interact seamlessly with third-party software and hardware solutions. Schröder EXEDRA is designed to unlock complete interoperability, as it offers the ability to:

- control devices (luminaires) from other brands
- manage controllers and to integrate sensors from other brands
- connect with third-party devices and platforms

A plug-and-play solution

As a gateway-less system using the cellular network, an intelligent automated commissioning process recognises, verifies and retrieves luminaire data into the user interface. The self-healing mesh between luminaire controllers enables real-time adaptive lighting to be configured directly via the user interface. OWLET IV luminaire controllers, optimised for Schröder EXEDRA, operate Schröder's luminaires and luminaires from third parties. They use both cellular and mesh radio networks, optimising geographical coverage and redundancy for continuous operation.

Tailored experience

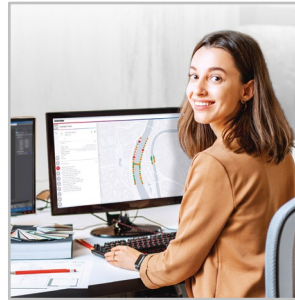

Schröder EXEDRA includes all advanced features needed for smart device management, real-time and scheduled control, dynamic and automated lighting scenarios, maintenance and field operation planning, energy consumption management and third-party connected hardware integration. It is fully configurable and includes tools for user management and multi-tenant policy that enables contractors, utilities or big cities to segregate projects.

A powerful tool for efficiency, rationalisation and decision making


Data is gold. Schröder EXEDRA brings it with all the clarity managers need to drive decisions. The platform collects massive amounts of data from end devices and, aggregates, analyses and intuitively displays them to help end-users take the right actions.

Protected on every side



Schröder EXEDRA provides state-of-the-art data security with encryption, hashing, tokenisation, and key management practices that protect data across the whole system and its associated services. The whole platform is ISO 27001 certified. It demonstrates that Schröder EXEDRA meets the requirements for establishing, implementing, maintaining and continually improving security management.

Mobile App: any time, any place, connect to your street lighting

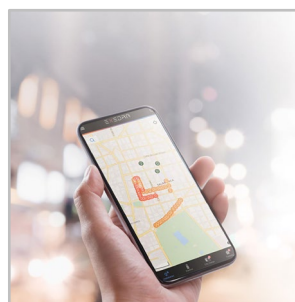


The Schröder EXEDRA mobile application offers the essential functionalities of the desktop platform, to accompany all types of operator on site in their daily effort to maximise the potential of connected lighting. It enables real-time control and settings, and contributes to effective maintenance.

The Zhaga consortium joined forces with the DiiA and produced a single Zhaga-D4i certification that combines the Zhaga Book 18 version 2 outdoor connectivity specifications with the DiiA's D4i specifications for intra-luminaire DALI.

2 sockets: top and bottom



The Zhaga socket is small and suited to applications where aesthetics is essential. The architecture of Zhaga-D4i also foresees the possibility of putting two sockets on one luminaire, allowing for instance, the combination of a detection sensor and a control node. This also has the added value of standardising certain detection sensor communications with the D4i protocol.

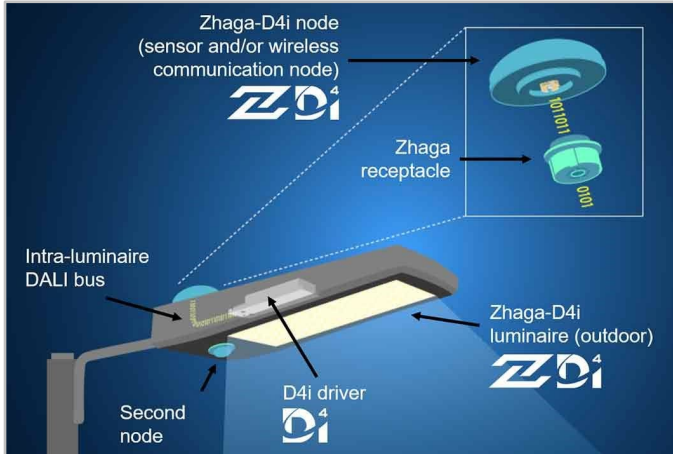

Standardisation for interoperable ecosystems



As a founding member of the Zhaga consortium, Schröder has participated in the creation of, and therefore supports, the Zhaga-D4i certification program and the initiative of this group to standardise an interoperable ecosystem. The D4i specifications take the best of the standard DALI2 protocol and adapt it to an intra-luminaire environment but it has certain limitations. Only luminaire mounted control devices can be combined with a Zhaga-D4i luminaire.

According to the specification, control devices are limited respectively to 2W and 1W average power consumption.


Certification program

The Zhaga-D4i certification covers all the critical features including mechanical fit, digital communication, data reporting and power requirements within a single luminaire, ensuring plug-and-play interoperability of luminaires (drivers) and peripherals such as connectivity nodes.


Cost-effective solution

A Zhaga-D4i certified luminaire includes drivers offering features that had previously been in the control node, like energy metering, which has in turn simplified the control device therefore reducing the price of the control system.

With the PureNight concept, Schröder offers the ultimate solution for restoring the night sky without switching off cities, while maintaining safety and well-being for people and preserving wildlife. The PureNight concept guarantees that your Schröder lighting solution satisfies environmental laws and requirements. Well-designed LED lighting has the potential to improve the environment in all respects.

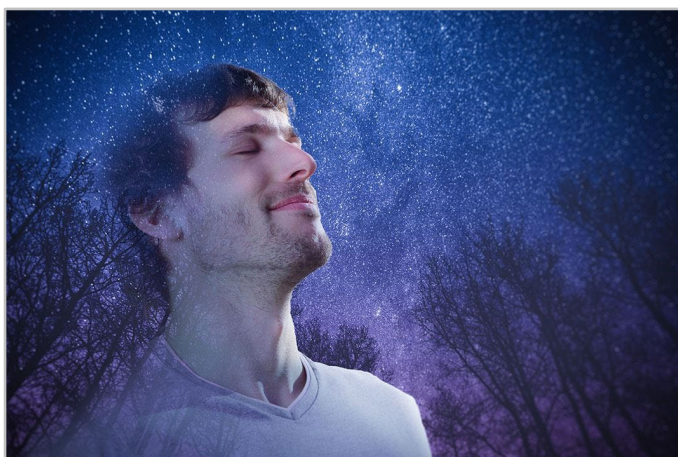

Protect wildlife

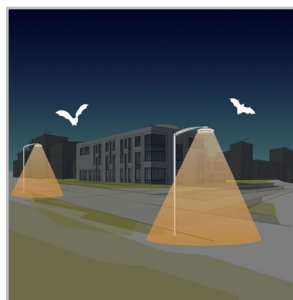

If not well designed, artificial lighting can badly affect wildlife. Blue light and excessive intensity can have a damaging effect on all types of life. Blue light radiation has the ability to suppress the production of melatonin, the hormone that contributes to the regulation of the circadian rhythm. It can also alter the behavioural patterns of animals including bats and moths, as it can change their movements towards or away from light sources. Schröder


favours warm white LEDs with minimal blue light, combined with advanced control systems including sensors. This enables permanent adaptation of the lighting to the real needs of the moment, minimising disturbance to the fauna and flora.

Get the starry sky back



The Upward Light Ratio (ULR) and Upward Light Output Ratio (ULOR), the latter taking the flux from the luminaire into account, provide information on the percentage of light emitted towards the sky. This Schröder range of luminaires minimises or eliminates (depending on the options) upward-directed light flux. It complies with strict international and local requirements.

Direct the light only where it is wanted and needed

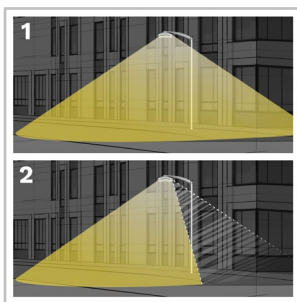

Schröder is renowned for its expertise in photometry. Our optics direct light only where it is wanted and needed. However, light trespass behind the luminaire might be a key concern when it comes to protecting a sensitive wildlife habitat or avoiding intrusive lighting towards buildings. Our fully integrated backlight solutions easily address this potential risk.

- 1. Without backlight
- 2. With backlight

Offer maximum visual comfort to people



Because of the lower installation height compared to road lighting, visual comfort is an essential aspect of urban lighting. Schröder designs lenses and accessories to minimise any type of glare (distracting, discomforting, disabling glare and blinding glare). Our design offices harness a range of possibilities to find the best solutions for each project and ensure that we provide a gentle light that delivers the best night-time experience.

GENERAL INFORMATION

Recommended installation height	4m to 15m 13' to 49'
Circle Light label	Score ≥ 90 - The product fully meets circular economy requirements
Driver included	Yes
CE mark	Yes
ENEC certified	Yes
ENEC+ certified	Yes
Zhaga-D4i certified	Yes
UKCA marking	Yes
Testing standard	EN 60598-1 IEC TR 62778 EN 62262 LM 79-08 (all measurements in ISO17025 accredited laboratory) LM 80 (all measurements in ISO17025 accredited laboratory)

HOUSING AND FINISH

Housing	Aluminium
Optic	PMMA
Protector	Tempered glass
Housing finish	Polyester powder coating
Standard colour(s)	AKZO grey 900 sanded
Tightness level	IP 66
Impact resistance	IK 09
Vibration test	Compliant with ANSI C 136-31 standard, 3G load Compliant with modified IEC 68-2-6 (0.5G)
Access for maintenance	Tool-less access to gear compartment

OPERATING CONDITIONS

Operating temperature range (Ta)	-40°C up to +50°C / -40° F up to 122°F
----------------------------------	--

· Depending on the luminaire configuration. For more details, please contact us.

ELECTRICAL INFORMATION

Electrical class	I, II
Nominal voltage	220-240V AC – 50-60Hz
Surge protection options (kV)	10
Electromagnetic compatibility (EMC)	EN 55015 / EN 61000-3-2 / EN 61000-3-3 / EN 61547
Control protocol(s)	1-10V, DALI
Control options	AmpDim, Bi-power, Custom dimming profile, Photocell, Remote management
Socket	Zhaga (optional) NEMA 7-pin (optional)
Associated control system(s)	Schröder EXEDRA
Sensor	PIR (optional)

OPTICAL INFORMATION

LED colour temperature	2200K (Warm White WW 722) 2700K (Warm White WW 727) 3000K (Warm White WW 730) 3000K (Warm White WW 830) 4000K (Neutral White NW 740) 5700K (Cool White CW 757)
Colour rendering index (CRI)	>70 (Warm White WW 722) >70 (Warm White WW 727) >70 (Warm White WW 730) >80 (Warm White WW 830) >70 (Neutral White NW 740) >70 (Cool White CW 757)
ULOR	0%
ULR	0%

· ULOR may be different according to the configuration. Please consult us.
· ULR may be different according to the configuration. Please consult us.

LIFETIME OF THE LEDS @ TQ 25°C

All configurations	100,000h - L95
--------------------	----------------


· Lifetime may be different according to the size/configurations. Please consult us.

DIMENSIONS AND MOUNTING


AxBxC (mm inch)	AMPERA EVO 1 : 524x128x308 20.6x5.0x12.1 AMPERA EVO 3 : 679x143x365 26.7x5.6x14.4
Weight (kg lbs)	AMPERA EVO 1 : 5.9-7.3 13.0-16.1 AMPERA EVO 3 : 8.9-10.4 19.6-22.9
Aerodynamic resistance (CxS)	AMPERA EVO 1 : 0.04 AMPERA EVO 3 : 0.04
Mounting possibilities	Side-entry slip-over – Ø32mm Side-entry slip-over – Ø42mm Side-entry slip-over – Ø48mm Side-entry slip-over – Ø60mm Side-entry penetrating – Ø60mm Post-top slip-over – Ø32mm Post-top slip-over – Ø42mm Post-top slip-over – Ø48mm Post-top slip-over – Ø60mm Post-top slip-over – Ø76mm Post-top penetrating – Ø60mm

· For more information about mounting possibilities, please consult the installation sheet.


· Dimensions given with Ø60mm spigot (side-entry mounting)

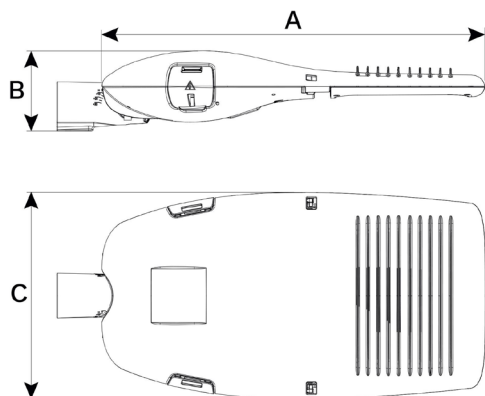


AMPERA EVO | Slip-over mounting for Ø32-60mm spigot - 2xM10 screws

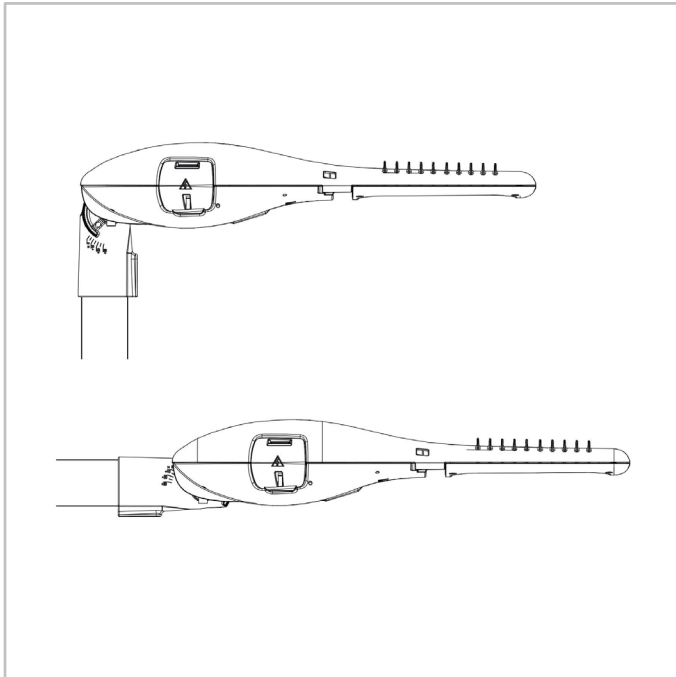

AMPERA EVO | Slip-over mounting for Ø32-76mm spigot - 2xM10 screws

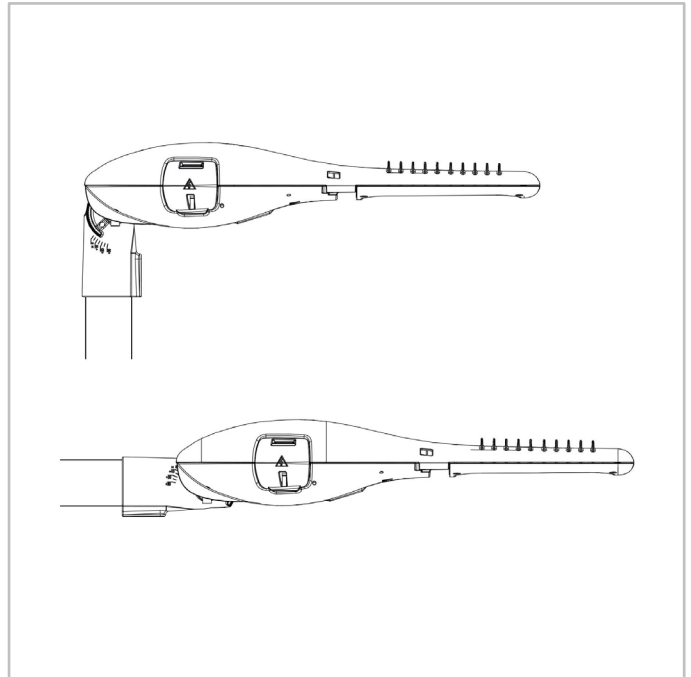

AMPERA EVO | Penetrating fixation for Ø60mm spigot - 2xM8 screws

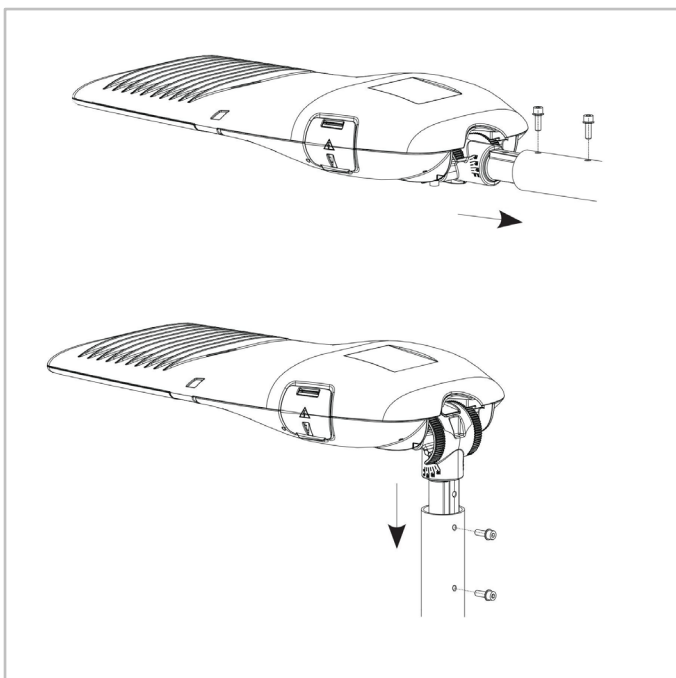




Number of LEDs	Luminaire output flux (lm)												Power consumption (W)		Luminaire efficacy (lm/W)
	Warm White WW 722		Warm White WW 727		Warm White WW 730		Warm White WW 830		Neutral White NW 740		Cool White CW 757				
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Up to
10	400	3100	400	3500	500	3700	400	3500	500	4000	500	3800	7	34	154
20	800	6200	900	7000	1000	7500	900	7000	1100	8100	1100	7700	13	67	165
30	1200	9400	1400	10500	1500	11200	1400	10500	1600	12200	1600	11600	18	99	175
40	1700	11300	1900	12700	2000	13600	1900	12700	2200	14700	2100	14100	24	111	180

Tolerance on LED flux is ± 7% and on total luminaire power ± 5 %




Number of LEDs	Luminaire output flux (lm)				Power consumption (W)		Luminaire efficacy (lm/W)
	Warm White WW 730		Neutral White NW 740				
	Min	Max	Min	Max	Min	Max	Up to
48	2000	5300	2100	5600	16	50	144
96	4100	10600	4300	11200	29	97	156

Tolerance on LED flux is ± 7% and on total luminaire power ± 5 %

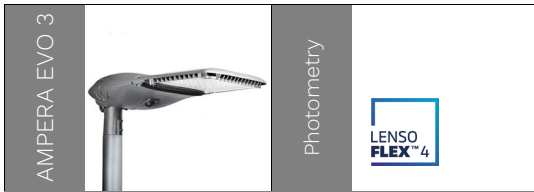

Number of LEDs	Luminaire output flux (lm)												Power consumption (W)		Luminaire efficacy (lm/W)
	Warm White WW 722		Warm White WW 727		Warm White WW 730		Warm White WW 830		Neutral White NW 740		Cool White CW 757				
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Up to
40	1700	11300	1900	12600	2000	13500	1900	12600	2200	14600	2100	14000	24	111	178
50	2100	13000	2300	14600	2500	15700	2300	14600	2700	17000	2600	16200	30	123	179
60	2500	15800	2800	17600	3000	19000	2800	17600	3300	20500	3100	19600	36	149	178
70	2900	17800	3300	19800	3600	21300	3300	19800	3800	23100	3700	22000	42	163	179
80	3400	19700	3800	22000	4100	23700	3800	22000	4400	25600	4200	24400	48	176	180

Tolerance on LED flux is ± 7% and on total luminaire power ± 5 %

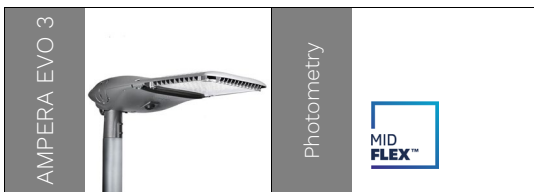

Number of LEDs	Luminaire output flux (lm)				Power consumption (W)		Luminaire efficacy (lm/W)
	Warm White WW 730		Neutral White NW 740				
	Min	Max	Min	Max	Min	Max	Up to
96	2900	10800	3000	11400	19	97	166
144	4400	16300	4600	17100	28	143	169
192	5800	20200	6100	21200	38	165	167

Tolerance on LED flux is ± 7% and on total luminaire power ± 5 %

