



## KARAKTERISTIKE >>>

### CHARACTERISTICS >>>

<b>Tip:</b> Type:	Hestia Mini/Midi
<b>Broj LED:</b> Number of LEDs:	Mini: 16-32 Midi: 48-64
<b>Nominalni fluks<sup>(1)</sup>:</b> Nominal flux <sup>(1)</sup> :	2560-10240 lm
<b>Temperatura boje:</b> CCT:	NW 4000K
<b>Indeks reprodukcije boje:</b> CRI:	NW >70
<b>Fotometrija:</b> Photometry:	Svetlosne raspodele za razne profile puteva i gradskih saobraćajnica. Lighting distributions for various profiles of motorways and city streets.
<b>Svetlosni fluks nakon 100.000h @ Tq=25°C</b> (% početnog fluksa): LED lumen depreciation after 100.000h @ Tq=25°C (% initial flux):	350/500 mA: 90% 700 mA: 80%
<b>Snaga svetiljke:</b> Luminaire power:	18-75 W
<b>Struja:</b> Electric current:	100-700 mA
<b>Nominalni napon:</b> Nominal voltage:	230V AC
<b>Klasa električne izolacije:</b> Electrical insulation class:	I ili II I or II
<b>Prenaponska zaštita:</b> Surge protection:	10 kV
<b>Stepen zaptivenosti<sup>(2)</sup>:</b> Tightness level <sup>(2)</sup> :	IP 65

**Elegantna i kompaktna, svetiljka Hestia LED nudi osvetljenje visokog kvaliteta uz malu potrošnju električne energije.**  
Elegant and compact, the Hestia LED luminaire offers high quality lighting with low energy consumption.

<b>Otpornost na udar<sup>(3)</sup>:</b> Impact resistance <sup>(3)</sup> :	staklo: glass:	IK 08
<b>Materijali:</b> Materials:	kućište: body:	aluminijum liven pod pritiskom die-cast aluminium
	protektor: protector:	zakrivljeno (Mini) ili ravno (Midi) staklo bended (Mini) or flat (Midi) glass
<b>Boja:</b> Colour:	AKZO grey 900 sanded druge boje dostupne na zahtev other colours available on request	
<b>Montaža:</b> Mounting:	horizontalna montaža Ø34mm dužine 85mm horizontal installation Ø34 mm, 85mm length	
<b>Regulacija svetla:</b> Lighting regulation:	Telemenadžment Owlet, daljinsko upravljanje (1-10V). Telemangement Owlet, remote control (1-10V).	
<b>Opcije:</b> Options:	Temperatura boje WW i CW Autonomna regulacija, dvostepena regulacija (50%), "Constant Lumen Output", fotočelija CCT WW and CW Autonomous Dimming, Bi-Power Relay (50%), Constant Lumen output, Photocell	

(1) Nominalni fluks je fluks LED izvora @Tj 25°C. Realni (izlazni) fluks svetiljke zavisi od efikasnosti optičkog bloka i ambijentalnih uslova (temperatura, zagađenje).

(2) The nominal flux is a LED flux @ Tj 25°C. The real (output) flux of the luminaire depends on the optical system of luminaire and environmental conditions (e.g. temperature and pollution).

(3) prema standardu / according to IEC - EN 60598

(\*) prema standardu / according to IEC - EN 62262



Zbog stalnih istraživanja i razvoja, zadržavamo pravo izmene specifikacija bez posebnog obaveštenja.

Due to continuous research and development, we reserve the right to alter the specifications without notice.




DIMENZIJE >>  
DIMENSIONS >>

	Mini	Midi
L	780 mm	924 mm
H	163 mm	170 mm
W	266 mm	324 mm

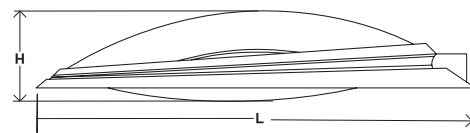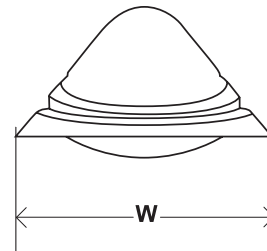

MONTAŽA >>  
MOUNTING >>

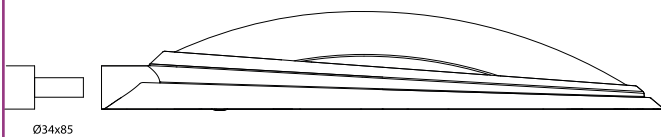

INSTALACIJA >>  
INSTALLATION >>

