



KARAKTERISTIKE >>

CHARACTERISTICS >>

Tip: Type:	SKIDO	
Broj LED: Number of LEDs:	6	
Nominalni fluks⁽¹⁾: Nominal flux ⁽¹⁾ :	2100-3000 lm	
Temperatura boje: CCT:	4000 K	
Indeks reprodukcije boje: CRI:	min. 70	
Fotometrija: Photometry:	Svetlosne raspodele za ulično osvetljenje. Light distributions for street lighting.	
Svetlosni fluks nakon 100.000 h @ T_a=25°C (% početnog fluksa): LED lumen depreciation after 100.000 h @ T _a =25°C (% initial flux):	≥70%	
Snaga svetiljke: Luminaire power:	14-24 W	
Nominalni napon: Nominal voltage:	220-240V 50 Hz	
Klasa električne izolacije: Electrical safety class:	I	
Prenaponska zaštita: Surge protection:	10 kV	
Stepen zaptivenosti⁽²⁾: Tightness level ⁽²⁾ :	optički blok: optical compartment:	IP 65
	upravljački blok: control gear compartment:	IP 65
Otpornost na udar^(**): Impact resistance ^(**) :	polikarbonat: PC:	IK 08

Svetiljka SKIDO predstavlja odličan izbor za projekte rekonstrukcije javnog osvetljenja gradova i opština, kao idealna zamena za svetiljke sa fluorescentnim izvorima.

The SKIDO luminaire is great choice for public lighting reconstruction projects, as perfect replacement for luminaires fitted with fluorescent lamps.

Otpornost na vetar(CxS): Aerodynamic resistance (CxS):	0,033 m²	
Maksimalna masa: Maximum Weight:	1,3 kg	
Materijali: Materials:	kućište: body:	aluminijum liven pod pritiskom die-cast aluminium
	protektor: protector:	polikarbonat polycarbonate
Boja: Colour:	RAL 7037 dusty grey druge boje dostupne na zahtev other colours available on request	
Montaža: Mounting:	horizontalna montaža Ø32-42mm horizontal installation Ø32-42 mm	
Ostalo: Other:	svetiljka se isporučuje sa napojnim kablom luminaire is delivered with power supply cable	
Regulacija svetla: Lighting regulation:	daljinsko upravljanje (1-10V, DALI), autonomna višestepena regulacija, dvostepena regulacija (50%), "Constant Lumen Output" Remote control (1-10V, DALI), Autonomous multistep Dimming, Bi-Power Relay (50%), "Constant Lumen Output"	
Opcije: Options:	fotočelija Photocell	

(1) Nominalni fluks je fluks LED izvora @T_j 25°C. Realni (izlazni) fluks svetiljke zavisi od efikasnosti optičkog bloka i ambijentalnih uslova (temperatura, zagađenje).

(2) The nominal flux is a LED flux @ T_j 25°C. The real (output) flux of the luminaire depends on the optical system of luminaire and environmental conditions (e.g. temperature and pollution).


(*) prema standardu / according to IEC - EN 60598

(**) prema standardu / according to IEC - EN 62262

Zbog stalnih istraživanja i razvoja, zadržavamo pravo izmene specifikacija bez posebnog obaveštenja.
Due to continuous research and development, we reserve the right to alter the specifications without notice.

DIMENZIJE>> DIMENSIONS>>

L	395 mm
H	54 mm
W	101 mm
Ø	32 do 42mm

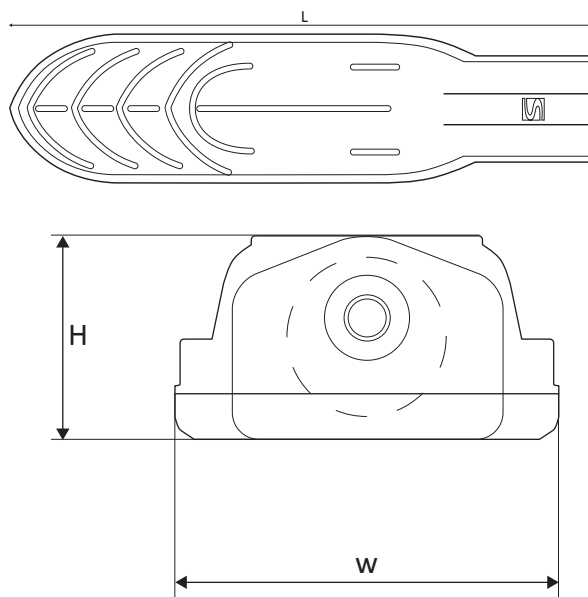

MONTAŽA>> MOUNTING>>



INSTALACIJA>> INSTALLATION>>

