



KARAKTERISTIKE >>>

CHARACTERISTICS >>>

Tip: Type:	VALENTINO GEN2		Otpornost na udar^(*): Impact resistance ^(*) :	IK 10	
Broj LED: Number of LEDs:	10-40		Otpornost na vetar (CxS): Aerodynamic resistance:	0,19 m ²	
Nominalni fluks⁽¹⁾: Nominal flux ⁽¹⁾ :	600-12300 lm		Maksimalna masa: Maximum Weight:	8,7-11,40 kg	
Temperatura boje: CCT:	2700-4000 K		Materijali: Materials:	kućište i poklopac: body and cover:	aluminijum liven pod pritiskom die-cast aluminium
Indeks reprodukcije boje: CRI:	min. 70			protektor: protector:	ravno staklo ili polikarbonat ('veliki protektor') flat glass or polycarbonate ('large protector')
Fotometrija: Photometry:	Simetrične i asimetrične svetlosne raspodele za parkove, trgove, pešačke zone i manje gradske saobraćajnice. Symmetrical and asymmetrical light distributions for parks, squares, pedestrian areas as well as for city streets and alleys.		Boja: Colour:	AKZO 900 grey sanded druge boje dostupne na zahtev other colours available on request	
Svetlosni fluks nakon 100.000h @ Tq=25°C (% početnog fluksa): LED lumen depreciation after 100.000h @ Tq=25°C (% initial flux):	≥70%		Montaža: Mounting:	vertikalna ili viseća montaža na cev od 3/4" montažu na stub završetka Ø60 mm post-top or suspended mounting on 3/4" threaded tube section post-top on Ø60 mm pole	
Snaga svetiljke: Luminaire power:	8-114 W		Regulacija svetla: Light regulation:	daljinsko upravljanje (1-10V, DALI), autonomna višestepena regulacija, dvostepena regulacija (50%), "Constant Lumen Output" Remote control (1-10V, DALI), Autonomous multistep Dimming, Bi-Power Relay (50%), "Constant Lumen output"	
Nominalni napon: Nominal voltage:	220-240V 50 Hz			Opcije: Options:	Protektori od polikarbonata sa različitim završnom obradom (providni ili opalni), senzori pokreta Zhaga-D4i Various PC protectors (clear or opal) PIR Presence detection Zhaga-D4i
Klasa električne izolacije: Electrical safety class:	I ili II I or II		Stepen zaptivenosti⁽²⁾: Tightness level ⁽²⁾ :		optički blok: optical compartment: IP 66
Prenaponska zaštita: Surge protection:	10 kV			deo sa uređajima: control gear compartment: IP 66	

Svetiljka VALENTINO GEN2 predstavlja spoj tradicionalnog dizajna i moderne tehnologije i kao takva namenjena je najpre istorijskim delovima grada.

The VALENTINO GEN2 luminaire incorporates modern technology into traditional design and therefore is perfect choice for historical parts of the city.

(*) Nominalni fluks je fluks LED izvora @Tj 25°C. Realni (izlazni) fluks svetiljke zavisi od efikasnosti optičkog bloka i ambijentalnih uslova (temperatura, zagađenje).

(1) The nominal flux is a LED flux @ Tj 25°C. The real (output) flux of the luminaire depends on the optical system of luminaire and environmental conditions (e.g. temperature and pollution).

(*) prema standardu / according to IEC - EN 60598


(**) prema standardu / according to IEC - EN 62262

Zbog stalnih istraživanja i razvoja, zadržavamo pravo izmene specifikacija bez posebnog obaveštenja.

Due to continuous research and development, we reserve the right to alter the specifications without notice.

DIMENZIJE >>
DIMENSIONS >>

A/C	400 mm
B	667 mm

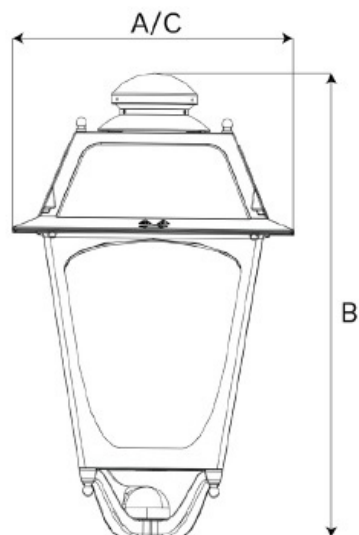

MONTAŽA >>
MOUNTING >>



INSTALACIJA >>
INSTALLATION >>

