

INDU WALL PACK



KARAKTERISTIKE>> CHARACTERISTICS>>

Svetiljka INDU WALL PACK je odličan izbor za različite primene u industrijskom osvetljenju kao u osvetljenju eksterijera zgrada, garaže, staza, stepenica i drugih spoljašnjih i unutrašnjih prostora.
The INDU WALL PACK luminaire is an excellent choice for various applications in industrial lighting as well as lighting building exteriors, garages, paths, stairs and other indoor and outdoor areas.

Tip: <i>Type:</i>	INDU WALL PACK 1, 2, 2 EM	Stepen zaptivenosti^(*): <i>Tightness level^(*):</i>	IP 65
Broj LED: <i>Number of LEDs:</i>	INDU WALL PACK 1: 24 INDU WALL PACK 2: 48 INDU WALL PACK 2 EM: 48	Otpornost na udar^(**): <i>Impact resistance^(**):</i>	IK 09
Nominalni fluks^(*): <i>Nominal flux^(*):</i>	max. 4500 lm	Maksimalna masa: <i>Maximum weight:</i>	INDU WALL PACK 1: 1,4 kg INDU WALL PACK 2: 2,1 kg INDU WALL PACK 2 EM: 2,3 kg
Temperatura boje: <i>CCT:</i>	3000-4000 K	Materijali: <i>Materials:</i>	kućište: <i>body:</i> aluminijum liven pod pritiskom, kompozitni materijal <i>die-cast aluminium, composite materials</i>
Indeks reprodukcije boje: <i>CRI:</i>	min.70		protektor: <i>protector:</i> polikarbonat <i>polycarbonate</i>
Fotometrija: <i>Photometry:</i>	Svetlosne raspodele za primene u industrijskom osvetljenju kao i manjim spoljašnjim i zatvorenim prostorima. <i>Light distributions for industrial lighting and lightining of small outdoor and indoor areas.</i>	Boja: <i>Colour:</i>	RAL 7040 window grey
Svetlosni fluks nakon 100.000h@Tq=25°C (% početnog fluksa): <i>LED lumen depreciation after 100.000h@Tq=25°C</i> <i>(% initial flux):</i>	≥70%	Montaža: <i>Mounting:</i>	Montaža na zid/ravnu površinu <i>Direct mounting on wall/flat surface</i>
Snaga svetiljke: <i>Luminaire power:</i>	INDU WALL PACK 1: 15W INDU WALL PACK 2: 35W INDU WALL PACK 2 EM: 4W	Regulacija svetla: <i>Light regulation:</i>	daljinsko upravljanje (1-10V, DALI 2.0) <i>Remote control (1-10V, DALI 2.0)</i>
Nominalni napon: <i>Nominal voltage:</i>	220-240V 50 Hz	Opcije: <i>Options:</i>	senzor pokreta i dnevnog svetla integrisana baterija <i>sensor (motion and daylight)</i> <i>Integrated battery</i>
Klasa električne izolacije: <i>Electrical safety class:</i>	I		
Prenaponska zaštita: <i>Surge protection:</i>	1 kV, opciono 2 kV/optional 2 kV		

(*) Nominalni fluks je fluks LED izvora @Tj 25°C. Realni (izlazni) fluks svetiljke zavisi od efikasnosti optičkog bloka i ambijentalnih uslova (temperatura, zagađenje).

(†) The nominal flux is a LED flux @ Tj 25°C. The real (output) flux of the luminaire depends on the optical system of luminaire and environmental conditions (e.g. temperature and pollution).

(*) prema standardu / according to IEC - EN 60598


(**) prema standardu / according to IEC - EN 62262

Zbog stalnih istraživanja i razvoja, zadržavamo pravo izmene specifikacija bez posebnog obaveštenja.
Due to continuous research and development, we reserve the right to alter the specifications without notice.



DIMENZIJE>> DIMENSIONS>>

	A	B	C
INDU WALL PACK 1	250 mm	117 mm	201 mm
INDU WALL PACK 2	320 mm	130 mm	257 mm
INDU WALL PACK 2 EM	320 mm	130 mm	257 mm

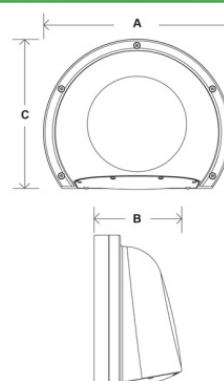

MONTAŽA>> MOUNTING>>



INSTALACIJA>> INSTALLATION>>

