



KARAKTERISTIKE >>>

CHARACTERISTICS >>>

Familija VALINTA GROOVE LED projektora je dizajnirana kako za urbano osvetljenje i kreiranje prijatnog ambijentalnog osvetljenja tako i za naglašavanje detalja u dekorativnom osvetljenju. The VALINTA GROOVE range of LED floodlights is designed for both urban lighting and creation of appealing ambient lighting and for accentuation of the details in illumination.

Tip: <i>Type:</i>	VALINTA GROOVE	Otpornost na udar^(*): <i>Impact resistance^(*):</i>	IK 09	
Broj LED: <i>Number of LEDs:</i>	VALINTA GROOVE MINI: 16 VALINTA GROOVE GOBO MINI: 1 VALINTA GROOVE MIDI: max. 28 VALINTA GROOVE MAXI: max. 52	Maksimalna masa: <i>Maximum Weight:</i>	VALINTA GROOVE MINI: 5,0-5,5 kg VALINTA GROOVE GOBO MINI: 5,0-5,2 kg VALINTA GROOVE MIDI: 7,1-7,5 kg VALINTA GROOVE MAXI: 10,0-10,5 kg	
Nominalni fluks^(*): <i>Nominal flux^(*):</i>	max. 13 758 lm	Materijali: <i>Materials:</i>	kućište: <i>body:</i>	aluminijum liven pod pritiskom <i>die-cast aluminium</i>
Temperatura boje: <i>CCT:</i>	2700-5600 K		protektor: <i>protector:</i>	kaljeno staklo <i>tempered glass</i>
Indeks reprodukcije boje: <i>CRI:</i>	min. 70			
Fotometrija: <i>Photometry:</i>	Veliki izbor simetričnih i asimetričnih svetlosnih raspodela. <i>Wide choice of symmetrical and asymmetrical light distributions.</i>	Montaža: <i>Mounting:</i>	Pogodna za montažu na ravnu površinu ili direktno na stub. Integrirani nosač omogućava podešavanje nagiba i rotaciju. <i>Compatible with surface or pole mounting.</i> <i>Integrated bracket allows tilt and rotation adjustment.</i>	
Svetlosni fluks nakon 100.000h@ Tq=25°C (% početnog fluksa): <i>LED lumen depreciation after 100.000h@Tq=25°C</i> <i>(% initial flux):</i>	≥70%		Regulacija svetla: <i>Lighting regulation:</i>	daljinsko upravljanje (1-10V, DMX-RDM), autonomno dimovanje u više koraka, dvostepena regulacija (50%), remote control (1-10V, DALI, DMX-RDM) Autonomous multistep Dimming, Bi-Power Relay (50%)
Snaga svetiljke: <i>Luminaire power:</i>	max. 120 W	Ostalo: <i>Other:</i>		Schröder EXEDRA Zhaga-D4i opcionalno/ <i>option</i> Svetiljka se isporučuje sa napojnim kablom. GOBO verzija za MINI veličinu <i>Luminaire is delivered with power supply cable.</i> GOBO version for MINI size only
Nominalni napon: <i>Nominal voltage:</i>	220-240 V 50 Hz			
Klasa električne izolacije: <i>Electrical insulation class:</i>	I ili II <i>I or II</i>			
Prenaponska zaštita: <i>Surge protection:</i>	10 kV			
Stepen zaptivenosti^(*): <i>Tightness level^(*):</i>	IP 66			


(*) Nominalni fluks je fluks LED izvora @T_a 25°C. Realni (izlazni) fluks svetiljke zavisi od efikasnosti optičkog bloka i ambijentalnih uslova (temperatura, zagađenje).

(*) The nominal flux is a LED flux @ T_a 25°C. The real (output) flux of the luminaire depends on the optical system of luminaire and environmental conditions (e.g. temperature and pollution).


(*) prema standardu / according to IEC - EN 60598

Zbog stalnih istraživanja i razvoja, zadržavamo pravo izmene specifikacija bez posebnog obaveštenja.
Due to continuous research and development, we reserve the right to alter the specifications without notice.

DIMENZIJE>> DIMENSIONS>>

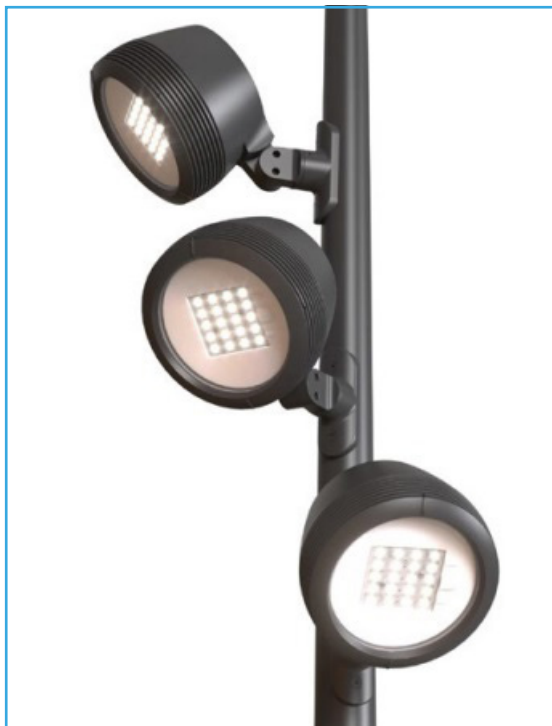

	VALINTA GROOVE MINI	VALINTA GROOVE GOBO MINI	VALINTA GROOVE MIDI	VALINTA GROOVE MAXI
A	195 mm	195 mm	266 mm	325 mm
B	296 mm	296 mm	366 mm	430 mm
C	216 mm	216 mm	212 mm	201 mm

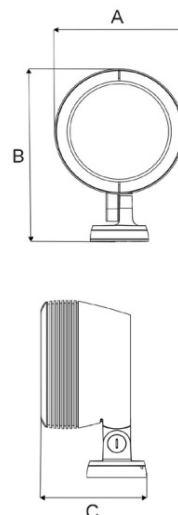

MONTAŽA>> MOUNTING>>



INSTALACIJA>> INSTALLATION>>

sa svetlosnim topom /
with canon



sa vizirom / with hood



sa zaštitnom rešetkom /
with protection greed



sa GOBO (samo MINI veličina) /
with GOBO (MINI size only)

